


BH50119 SERIES

BH50119 series provides a 50mm through-bore for routing of hydraulic or pneumatic lines or hydraulic or pneumatic rotating shaft installation, and a compact 119mm outside diameter, features long life, fiber brush contact technology for ultimate performance in many challenging applications. BH50119 series are standard, off-the-shelf products, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. It can transmit signal (2A), 10A, multiple 10A current when 360° degree free rotating.

Product images

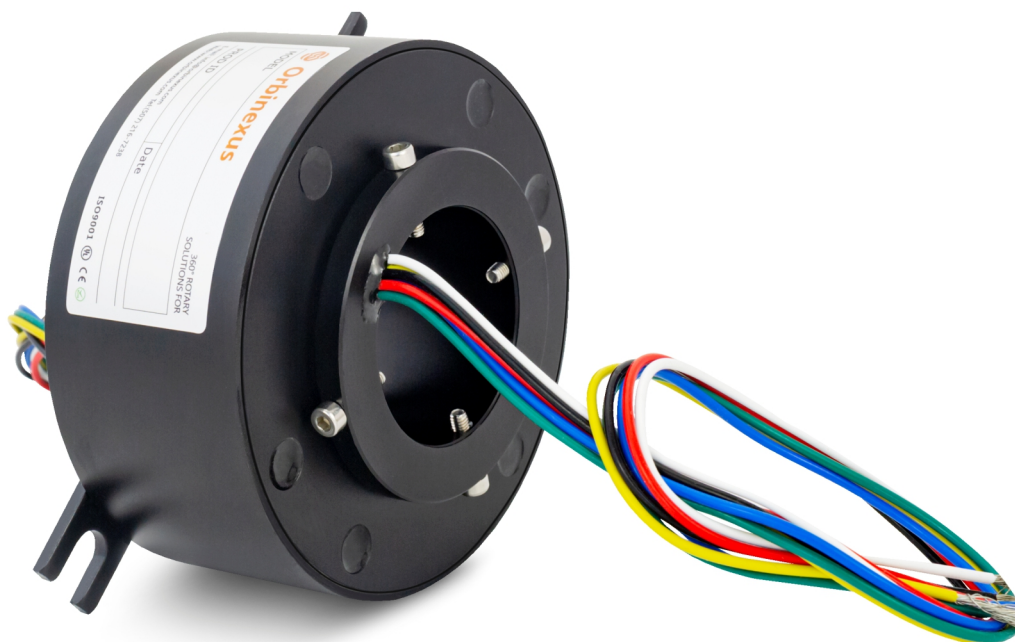


The pictures are for reference only

As the signal pathway increases or the combination of light and electricity results in changes in the appearance and size of the product, the actual product shall prevail.

Part# Explanation

BH 50119-P 0610-S 06-VC		Product quality level
BH:through bore slip ring		VC-common quality version
50119:50-ID 50mm; 119-OD119mm		VD-industrial quality version
P:power ring		VH-Top end product level
0610:06-6rings;rated 10A/ring		Default=VC
		06:6 rings
		S:signal(5A)

Dimensions

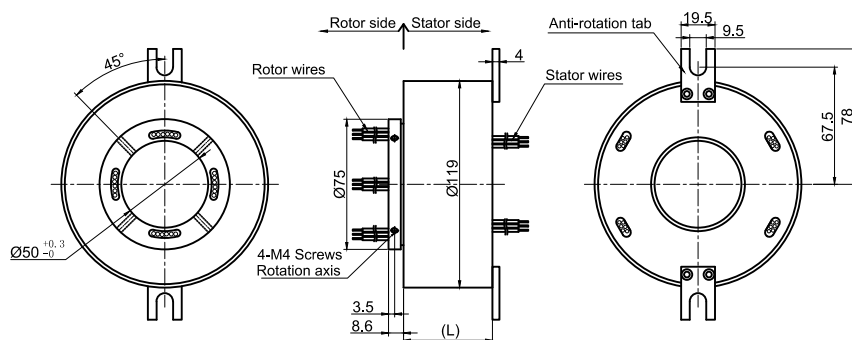

BH50119 Series Parts# List

Part#	10A	Signal or 5A	Length-L (mm)
BH50119-S02	0	2	36
BH50119-P0210	2	0	36
BH50119-S03	0	3	39.8
BH50119-P0310	3	0	39.8
BH50119-S06	0	6	51.2
BH50119-P0210-S04	2	4	51.2
BH50119-P0410-S02	4	2	51.2
BH50119-P0610	6	0	51.2
BH50119-S12	0	12	74
BH50119-P0210-S10	2	10	74
BH50119-P0310-S09	3	9	74
BH50119-P0610-S06	6	6	74
BH50119-P0810-S04	8	4	74
BH50119-P1010-S02	10	2	74
BH50119-P1210	12	0	74
BH50119-S18	0	18	96.8
BH50119-P0210-S16	2	16	96.8
BH50119-P0410-S14	4	14	96.8
BH50119-P0610-S12	6	12	96.8
BH50119-P0810-S10	8	10	96.8
BH50119-P1010-S08	10	8	96.8
BH50119-P1210-S06	12	6	96.8
BH50119-P1410-S04	14	4	96.8
BH50119-P1610-S02	16	2	96.8

BH50119 Series Parts# List

Part#	10A	Signal or 5A	Length-L (mm)
BH50119-S24	0	24	119.6
BH50119-P0410-S20	4	20	119.6
BH50119-P0610-S18	6	18	119.6
BH50119-P1210-S12	12	12	119.6
BH50119-P1810-S06	18	6	119.6
BH50119-P2410	24	0	119.6
BH50119-S30	0	30	142.4
BH50119-P0610-S24	6	24	142.4
BH50119-P1210-S18	12	18	142.4
BH50119-P1810-S12	18	12	142.4
BH50119-P2410-S06	24	6	142.4
BH50119-P3010	30	0	142.4
BH50119-S36	0	36	169.2
BH50119-P0610-S30	6	30	169.2
BH50119-P1210-S24	12	24	169.2
BH50119-P3610	36	0	169.2
BH50119-S42	0	42	192
BH50119-P0610-S36	6	36	192
BH50119-P1210-S30	12	30	192
BH50119-S48	0	48	217.4
BH50119-P0610-S42	6	42	217.4
BH50119-P0910-S39	9	39	217.4
BH50119-P1210-S36	12	36	217.4
BH50119-P1810-S30	18	30	217.4
BH50119-P2410-S24	24	24	217.4
BH50119-S60	0	60	263
BH50119-P0610-S54	6	54	263
BH50119-P0910-S51	9	51	263
BH50119-P1210-S48	12	48	263
BH50119-S72	0	72	312.6
BH50119-P0610-S66	6	66	312.6
BH50119-P1210-S60	12	60	312.6
BH50119-P2410-S48	24	48	312.6
BH50119-P3610-S36	36	36	312.6
BH50119-S84	0	84	358.2
BH50119-P1210-S72	12	72	358.2
BH50119-P2410-S60	24	60	358.2
BH50119-P3610-S48	36	48	358.2
BH50119-S96	0	96	403.8
BH50119-P1210-S84	12	84	403.8
BH50119-P2410-S72	24	72	403.8
BH50119-P3610-S60	36	60	403.8
BH50119-P4210-S54	42	54	403.8
BH50119-S108	0	108	453.4
BH50119-P1210-S96	12	96	453.4
BH50119-P2410-S84	24	84	453.4
BH50119-P3610-S72	36	72	453.4
BH50119-P4810-S60	48	60	453.4

Note: N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A. 10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for more detmails.

Electrical parameters

Project	Power	Signal
Rated Voltage	0~690VAC/VDC	0~440VAC/VDC
Insulation Resistance	≥1000MΩ/1000VDC	≥1000MΩ/500VDC
Lead Wires	AWG16#Teflon	AWG22#Teflon
Lead Length	Standard 300mm(adjustable)	
Insulation Strength	1000VAC@50Hz, 60s	
Electrical Noise	<0.01Ω	

Mechanical Data

Project	Value
Working Life	See Product Quality Level Table
Rotating Speed	See Product Quality Level Table
Working Temperature	-30°C~80°C
Operating Humidity	0~85% RH
Contact Material	See Product Quality Level Table
Housing Material	Aluminium Alloy / Engineering plastic
Torque	0.1N.m, +0.03N.m/6rings
Protection Grade	IP51

Product Quality Level Table

Products Level Code	Max Rotating Speed	Working Life	Contact Material
VC	250RPM	20 Million Revs	Precious Metal
VD	600RPM	50 Million Revs	Gold-plated
VH	1000RPM	100 Million Revs	Gold-Gold

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YEL	GRN	BLU	WHT	BLK	RED	YEL	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options For Custom Slip Ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

1. Cable exit way and cable length can be customized for both rotor and stator.
2. Because of the structure limitation, length/height/OD can be customized on your request.
3. Support current or signal up to 200 rings.
4. Aviation plug, terminal and heat-shrink tube are optional.
5. Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.

6. Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
 7. Can combine temperature control signal with thermocouple signal.
 8. Special environment can be customized, such as quakeproof, high temperature, etc.
 9. Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
 10. High temperature can up to 500 degrees.
 11. High pressure can up to 110KV
 12. Rotating speed can up to 10000RPM
 13. Maximum current can up to 5000 amperes.1Military grade
 14. Optional for underwater IP65, Ip68.
 15. Optional for stainless steel housing
- Technical support: Info@orbinexus.com